

Please fill this order Order confirmation

For office use only

DEALER

Date: _____ Dealer #: _____

P.O.# _____

Dealer: _____

Phone: _____ FAX: _____

CUSTOMER

Customer: _____

Job Name: _____

SHIPPING

Please indicate any special shipment requests for our consideration. Your Order Acknowledgement will provide estimated ship date. Please contact your CSR if the Order Acknowledgement differs from your requirements.

Requested Ship Date: _____

Ship on or before Ship on or after

Ship to: _____

Truck Air

Prepaid Collect 3rd Party

Hold and Call Hold for pickup at terminal

Ship Via: _____

Special instructions: _____

MISCELLANEOUS

Custom Presentation Drawings Required - Quantity

DO NOT manufacture until Custom Presentation Drawings are approved and returned

Process order without approval of Custom Presentation Drawings

Ordered by: _____

Received by: _____

STANDARD EQUIPMENT



- Push Button Platform Control Switch, Key Operation
- Ail Controls -constant pressure
- Emergency Stop and Alarm on Platform Control
- Low Voltage Controls- 24 Volt
- 42" high Platform Gate
- 42" high Top Landing Gate
- Lower Landing Gate
- Fascia Panel
- Grab Rail on Guard Panel opposite Tower
- 42" high Platform Guard Panels
- 36" x 60" Platform with Non-skid Surface
- 31-1/2" long Fixed Access Ramp
- Universal Wiring Harness for doors, gates, interlocks and electric strikes
- 756 lb. Capacity
- Taupe Powder Coat Finish
- UL Listed

LIFTING HEIGHT

Measure the EXACT lifting height or "H" dimension. Measurement must be a vertical line taken from the top landing to the bottom landing. For pit mounted units, measure from the bottom of the pit. Fill in Lifting Height and check the appropriate box to indicate type of mount below.

Exact Lifting Height (H): _____ in. (mm)

Pit Mount Floor Mount



MODEL

Check the box by the desired model number.

PL-TG 50

PL-TG 84



DRIVE

- Ball Screw
- Roped Hydruh

CONTROLS

- Push Button Call/Send Controls** at top and bottom landings with Key Operation
 - Standard mount Flush mount
 - In Lower Landing Gate Post (TG50 only) In Top Landing Gate Post
- Push Button Call/Send Controls** at top and bottom landings with Key Operation, **Emergency Stop** and **Signaling Device** (6Volt Battery not included)
 - Standard mount flush mount In Top Landing Gate Post
- Paddle Call/Send Controls** at top and bottom landings with Key Operation
 - Standard mount Flush mount In Top Landing Gate Post
- Paddle Call/Send Controls** at top and bottom landings with Key Operation, **Emergency Stop** and **Signaling Device** (6 Volt Battery not included)
 - Standard mount Flush mount In Top Landing Gate Post
- Paddb Control on Platform
- Signaling Device on Platform Controls (6 volt battery not included)

GATES

- 1/4" (6.3mm) Acrylic Insert in Top Landing Gate
 - Clear Acrylic Bronze Tinted Acrylic
- 1/4" (6.3mm) Acrylic Insert in Platform Gate and Lower Landing Gate (Available only on PL-TG 50 model)
 - Clear Acrylic Bronze Tinted Acrylic
- Reverse Swing Lower Landing Gate**
- 42" (1067mm) Extra wide, 42" (1067mm) high Top Landing Gate** for use with 90° Exit Platform (Standard Top Landing Gate is not provided when this option is ordered)

DOORS

- 6'8" (2032mm) Flush Mount 1 -1/2 hr. **Fire Rated Door and Frame** - includes Wire Glass Window (4"x24"), Keyed Dead Latch, flush Mount Electric Strike, Selfclosure and Door Pull (Standard Top Landing Gate is not provided when this option is ordered)
- 6'8" (2032mm) Flush Mount **Non-Fire Rated Door and Frame** - includes 1/4" Bronze Tinted Acrylic Vision Panel (27"x67"), Keyed Dead Latch, Flush Mount Electric Strike, Self-closure and Door Pull (Standard Top Landing Gate is not provided when this option is ordered)
- Access ESI (Top Landing Door by others; indicate swing at right)
- Flush Mount **Electric Strike** (Top Landing Door or gate by others)
 - Wood jamb Metal jamb Aluminum jamb
- Keyed Bond Latch** (for use with Flush Mount Electric Strike)
- Automatic **Opener/Closer** (for doors and gates)

PLATFORMS

- 36" x 48" (914mm x 1219mm) Platform with Non-skid Surface** (Available only on PL-TG 59 model)
- 90° Exit Platform** (Bottom landing entry through 36' side with top landing exit through 46" or 60" side; available only on PL-TG 56 model)
- Platform Safety Pan

MISCELLANEOUS

- Pressure Gauge** (hydraulic drive units only)
 - Tower Braces - qty. 2** (anchors tower to wall)
 - Removable Base**
 - Telephone Jack** (below Platform Control)
 - 36" (914mm) wide Over-the-Step Bridge** Measure exact BH and BL dimensions. (Not available on 90° Exit Platform)
- 84" (2133mm) Max. (BH) Bridge Height


120" (3048mm) Max. (BL) Bridge Length

Allow 3" (76mm) Footing Clearance
- BH in. (mm) _____
 - BL in. (mm) _____
 - Optional Color:** Ivory Pearl Gray Sable Brown
 - Special Order Color:** (specify RAL No.) _____


Diagrams show "bird's eye view" with lower landing positioned at bottom.

TOWER/PLATFORM ORIENTATION

STRAIGHT THROUGH




90° EXIT PLATFORM
(Model PL-TG 50 only)




PLATFORM GATE and LOWER LANDING GATE

STRAIGHT THROUGH

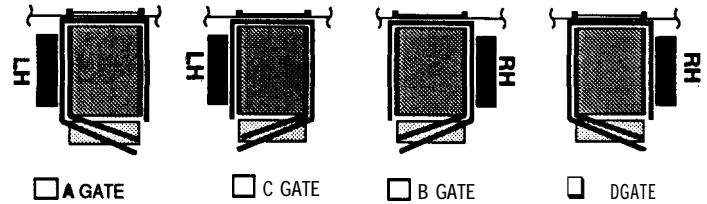


90° EXIT PLATFORM
(Model PL-TG 50 only)

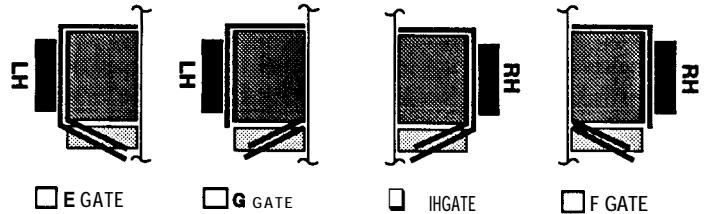

TOP LANDING GATE or DOOR


STRAIGHT THROUGH

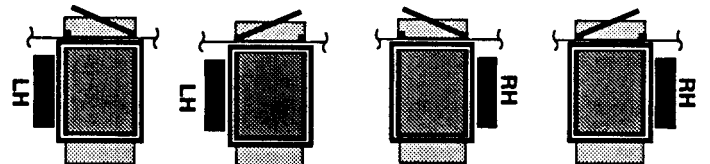

- IH GATE J GATE II GATE JJ GATE
- IHCCR IJXXXI IIDCCR JJDCGR
- IAcoeUE9t **Access ESI**** AccessESr AcoessESI*

* Door by others

90° EXIT PLATFORM
(Model PL-TG 50 only)

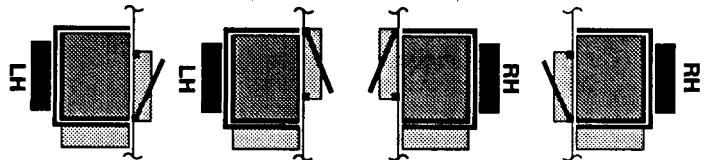

- II GATE J GATE II GATE JJ GATE
- IIDDDR IJDCCR II DOOR IJDCXIR
- Access ESI** IAcaUESt **Access ESI**** Access ESI**

** Door by others